

MAGNETS IN LIQUID & DEMAGNETIZERS

NAIL & SCREW HOLDER

Never hold nails in your mouth again. Handy magnetic wristband nail & screw holder provides a safe and convenient place to keep fasteners and small tools.

FEATURES:

- » 10" Band Circumference
- » Prevents dropping of tools or fasteners



Type	Cup Dia. (in)	Cup Height (in)	OAH (in)	Weight. (lbs)	Model No.
Wristband	2-1/32	5/16	0.390	0.24	MX2000W

MAG-MAID COOLANT CLEAN OUT TOOL

This powerful Rare Earth clean-up tool safely removes metal chips and debris from machinery and work areas. The large comfortable handle is attached to Rare Earth magnets inside the seam-welded, stainless steel tube. To clean this tool, pull the handle away from the stainless steel tube. Collected scrap metal will follow the magnet up the tube until it hits the stripper washer. Once the magnet is past the stripper washer, the magnetic influence will dissipate and the metal falls off. No need to pull or wipe off collected metal.

FEATURES:

- » Maximum temperature 180°F (82°C)
- » Seam-welded, .053" thick tube prevents denting
- » Large grip handle



Diameter (in)	Shaft Length (in)	OAL (in)	Weight (lbs)	Model No.
1	15	19.25	1.25	MM1500EZ
1	36	40.25	2.75	MM3600EZ

SALVAGE MAGNETS



FEATURES:

- » Retrieves tools, parts, key rings, fishing tackle & more
- » Powerful ceramic magnets for wet or dry applications
- » HDR3045 has a durable stainless steel case and can retrieve broken drill bits from oil & water wells



Lift - lbs (kg)	Size (in)	Weight (lbs)	Model No.
35.0 (15.88)	3-1/2 Dia. x 2-1/2 L	1.07	DT3500
92.5 (41.96)	5-1/4 x 1-7/8 x 2-3/4	1.80	DT0600
300.0 (136.08)	3 Dia. x 5-3/4 L	5.00	HDR3045

CLEAN-OUT RETRIEVERS



FEATURES:

- » Retrieve ferrous metal items from tanks, acid baths, oil reservoirs, heat bake ovens, etc.
- » Alnico Magnet is attached to a 48 inch wood handle
- » Maximum temperature 300°F (148°C)

Lift - lbs (kg)	Diameter (in)	Length (in)	Weight (lbs)	Model No.
12.0 (5.45)	1-3/8	48	1.60	COR12
35.0 (15.88)	2-1/2	48	2.50	COR35





CONTINUOUS DUTY SURFACE TYPE DEMAGNETIZERS

Surface Type Demagnetizers are designed for stationary or portable use, providing continuous duty operation as work pieces pass the demagnetizer's face plate. This design allows for installation under, over or alongside conveyors for demagnetizing applications.

FEATURES:

- » Durable, one-piece face plate
- » On/Off switch
- » Portable and/or stationary design
- » Integrated side handles for hand held operation
- » AC On Indicator (DSC423 Only)

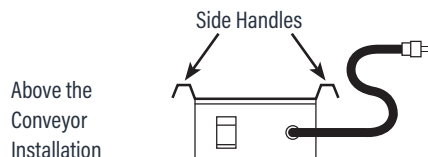

Best Direction of Flow
The Strongest area is located at the center of the demagnetizer



Note: 10 ft. cord with grounded plug on 120 VAC models only. 240 VAC models have a 6 ft. three wire cord without plug.

Height (in)	Width (in)	Length (in)	Demagnetization Area (in)	Ctr. 1 (in)	Ctr. 2 (in)	Hole Diameter (in)	Weight (lbs)	Amps (120 VAC)	Amps (240 VAC)	Amps (480 VAC)	Model No.
3-13/16	4-3/4	7-1/4	3 x 4.5	5-5/16	5-3/8	1/4	15.0	2.1	1.1	0.52	DSC423
4-15/16	6-1/4	11-1/4	4 x 6	7-13/16	6-7/8	5/16	33.0	9.0	5.0	2.50	DSC424

CONTINUOUS LOOP TYPE DEMAGNETIZERS AVAILABLE UPON REQUEST