


# MAGNETIC RETRIEVERS & MECHANICAL FINGERS **MAG-MATE®**



## ■ Pocket Tools & Retrievers

Ideal for reaching behind, underneath or around machinery and/or difficult to reach areas. The Fixed Shaft and Telescoping Shaft Magnetic Retrievers feature several Magnet Head styles that include the Fixed Head, Single Ball Swivel Head and the Double Ball Swivel Hinge Head that allow for more control and functionality. Powerful Rare Earth magnet material, except where noted. All Rare Earth tools have a maximum temperature of 180°F (82°C).

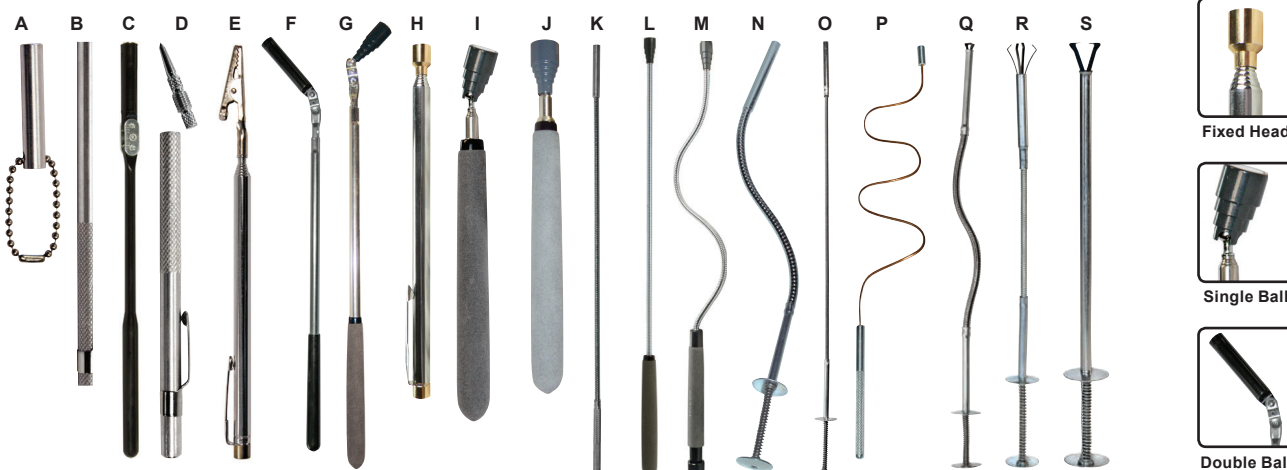

### Fixed Shaft Retrievers & Tools

Description	Lift - lbs (kg)	Shaft	Dia. (in)	Ln. (in)	Wt. (lbs)	Model No.
A Key chain retriever. Powerful Rare Earth magnet encased in an Aluminum Rod.	4.0 (1.815)	AL	3/8	2	0.03	KCR375
B Pen sized magnetic tool. Sturdy clip holds magnet firmly in pocket.	2.5 (1.134)	AL	5/16	6	0.06	906
C Double Ball Swivel Hinge Head. Non-conductive Nylon handle.	1.0 (0.453)	NY	5/16	8-1/4	0.05	909
D Precision ground carbide tip scribe is reversible. Magnet is located on the other end.	2.5 (1.134)	AL	5/16	5	0.05	92CLP

### Telescoping Shaft Retrievers & Tools

Description	Lift - lbs (kg)	Shaft	Dia. (in)	Ln. (in)	Ext. (in)	Wt. (lbs)	Model No.
E Stainless steel pen sized pilot lighter with match holding alligator clip.	N/A	SS	1/4	7-1/2	25-1/2	0.07	PL01
F Double Ball Swivel Hinge Head. Hex rod prevents magnet from swinging while in use.	7.5 (3.402)	ZP	1/2	17	26-1/2	0.36	927
G Double Ball Swivel Hinge Head. Hex rod prevents magnet from swinging while in use.	12.0 (5.444)	ZP	1/2	13	26	0.44	931
H Stainless steel pen sized tool for tiny jobs. Comes with pocket clip.	2.0 (0.908)	CP	5/16	5-1/2	25-1/2	0.07	240N
I Magnetic retriever w/ Single Ball Swivel Head and nonslip solvent-resistant comfort grip.	7.0 (3.176)	SS	5/8	8	35	0.19	925
J1	5.0 (2.268)	SS	3/8	6-1/2	32	0.14	923
J2 Magnetic retriever w/ fixed head and nonslip solvent-resistant comfort grip.	7.0 (3.176)	SS	5/8	6-1/2	32	0.18	924
J3	20.0 (9.072)	ZP	1-1/8	16-1/2	29	0.65	990SM
J4 Ex-long, heavy duty, magnetic retriever w/ fixed head & nonslip solvent-resistant comfort grip.	14.0 (6.351)	ZP/SS	5/8	23-1/2	50	0.42	926

### Flexible/Bendable Shaft Retrievers & Tools

Description	Lift - lbs (kg)	Shaft	Dia. (in)	Ln. (in)	Wt. (lbs)	Model No.
K Rigid retrieving tool that becomes flexible by removing wire rod from the shaft.	1.5 (0.681)	ZP	5/16	18	0.18	918F
L Flexible retriever w/ fixed head and nonslip solvent-resistant comfort grip	8.0 (3.628)	ZP	1/2	21	0.25	921
M1 Flexible, dual purpose allows you to get in and around awkward spots. Bend shaft to a permanent position or remove inside wire to snake into position.	3.0 (1.361)	ZP	3/8	20	0.31	928S
M2	7.0 (3.176)	ZP	5/8	20	0.35	929S
N Bendable retriever bends and holds its shape. Magnet is retracted until the button is pushed.	2.0 (0.908)	ZP	5/16	17	0.26	915RM
O Flexible retriever has a spring shaft that allows it to snake through tight areas. The magnet is retracted until the button is pushed.	2.0 (0.908)	ZP	3/8	24	0.29	922RM
P1	3.0 (1.361)	CO	5/16	25	0.11	900WF
P2 Bendable copper shaft magnetic retriever. Fits into tight spots. Knurled aluminum handle.	0.5 (0.227)	CO	0.175	20	0.08	900WFT

### Mechanical Finger Retrievers & Tools

Description	Lift - lbs	Shaft	Dia. (in)	Ln. (in)	Wt. (lbs)	Model No.
Q Flexible two jaw mechanical finger with a spring/plunger handle control. Mechanical finger span of 1".	12	ZP	3/8	17	0.25	715CF
R1 Flexible four jaw mechanical finger with a spring/plunger handle control. Mechanical finger span of 1".	10	ZP	1/2	13-1/2	0.20	612
R2		ZP	1/2	23-1/2	0.30	622
S1 Rigid two jaw mechanical finger with a spring/plunger handle control. Mechanical finger span of 1".	12	ZP	3/16	8	0.15	708
S2		ZP	3/16	12	0.22	712

Shaft Material: AL = Aluminum, CO = Copper, CP = Chrome Plated Steel, NY = Nylon, SS = Stainless Steel & ZP = Zinc Plated Steel.

## ■ Lighted Magnetic Pick-up Tool



Rare Earth, telescoping, magnetic retriever with built in light. Uses 3 LR44 watch-type batteries (included).



Description	Lift - lbs (kg)	Shaft	Magnet (in.)	Magnet Head	Ln. (in.)	Wt. (lbs.)	Model No
Lighted	22 (9.98)	Stainless Steel	11/16	Fixed	7-1/2 - 32	0.20	MRT910L