

LIFT MAGNET ACCESSORIES



Round Electromagnet Lifts



Round Electro Lift Magnets (RELM) provide concentrated holding power and a deep reaching magnetic field to lift thick, non-flexing, ferrous items. 100% Duty Cycle

Features

- No separate power supply required
- Control switch “On, Off and Release” functions
- Lower wattage requirements, higher lifting capacities and a lower unit weight than competitors
- 3’ long heavy-duty cord w/ plug



NOTE: RELMs are not intended to be used as scrap handling magnets. Picking up several pieces of steel at once is not recommended and may result in serious injury or property damage.

Model No.	WLL	Voltage (VAC)	Watts	Amps	Magnet Dia. (A)	Magnet Height (B)	Overall Height (C)	Bail Ht.	Bail Wd.	Weight (lbs.)
RELM06	1,000	120	85	0.8	6"	3"	6"	1-5/16"	1-5/16"	30
RELM08	2,000	120	130	1.1	8"	4-1/8"	7-3/8"	1-5/16"	1-5/16"	58
RELM10	3,000	120	170	1.5	10"	4-3/8"	8-3/8"	1-5/16"	1-5/16"	86
RELM12	4,500	120	200	2.0	12"	5-1/4"	9-1/4"	1-3/4"	1-3/4"	152
RELM16	8,000	120	310	3.0	16"	6-3/4"	12-3/4"	6"	3-1/2"	365
RELM20	12,000	120	570	5.0	20"	7-1/2"	14"	7"	4"	545

*RELM WLL Values are stated at 50% of Breakaway Value. Design Factor 2:1.

Battery Lifts

Battery Lift Magnets (BLM) operate from a self-contained automotive type battery (not included), which results in maximum convenience, portability, versatility, and dependability. BLMs make loading and unloading of thick non-flexing ferrous parts simple and fast. No need for external power cords. Ideal for remote locations. Built-in chargers and a visible power gauge. No fancy lights, whistles or bells that can malfunction.



NOTE: BLMs are not intended to be used as scrap handling magnets. Picking up several pieces of steel at once is not recommended and may result in serious injury or property damage.

WeighPlus™ Crane Scale

The WeighPlus™ crane scale is a programmable, computerized, self-contained, and battery-operated crane scale with overload warning. The scale housing is made of durable stainless steel. All electronics are shock mounted and the recessed display and control area provides additional protection.

Features

- Capacities of 5,000 lbs. and 15,000 lbs.
- Accurate to ±0.2% (0.002)
- Programmable Working Load Limit (WLL)
- Alarm function
- Power save mode
- Shock mounted electronics
- Uses 4 D-cell batteries, included
- LCD screen, multi colored
- Large top lift loop for easy crane use
- Zero Function. “Load Tare”. Can zero out weight of lifting device (magnet, chain, sling, etc.)
- Light weight design
- USA M.A.D.E.™



Model No.	Working Load Limit (lbs)	Overall Height (in)	Overall Width (in)	Overall Length (in)	Bail Thickness (in)	Bail Opening Height (in)	Bail Opening Width (in)	Clevis Opening (in)	Weight (lbs)
WPS05	5000	12.77	7.70	6.50	1.00	3.50	2.00	1.42	8
WPS15	15,000	12.77	7.70	6.50	1.00	3.50	2.00	1.42	8


Load Control Magnet



Stay safe. This extremely powerful On/Off Permanent Rare Earth magnet lets you guide loads into position without being in close proximity. Attach On/Off permanent magnet to a corner or along the side of your load. As the load is lifted, the Load Control Magnet’s articulating connection to the lightweight telescoping pole allows you to control and position the load exactly where you want without endangering yourself, others or expensive equipment, should your lifting device fail.

Features

- Powerful On/Off Rare Earth Magnet
- Works on Flat and Pipe
- Pole telescopes from 6’ to 12’
- Buy the magnet separately, use your own pole

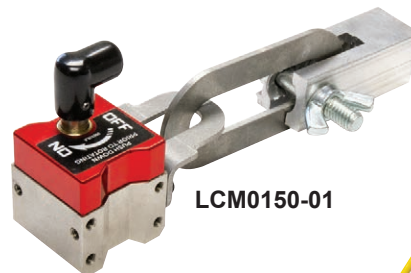

LCM0150-02

Hold - lbs (kg)	Pole Included	Ln. (in)	Ext. (in)	Wt. (lbs)	Model No.
150 (68.04)	No	7	N/A	1.20	LCM0150-01
150 (68.04)	Yes	80	147	2.70	LCM0150-02

Note: Magnet connector accepts a standard paint roller handle extension thread.