



## Click Style Hose Clamp Pliers


Tired of breaking off reusable "click" style hose Clamps? These pliers have 360° swivel heads that provide access at any angle. Remove & install click clamps without destroying clamps! "Click" clamps are often found on power steering & other high pressure lines.

### Features

- Quick clean vinyl grip
- PLC100 has 2" jaws for small clips
- PLC110 has 4" jaws for larger or hard to reach clamps



"Click" Clamp

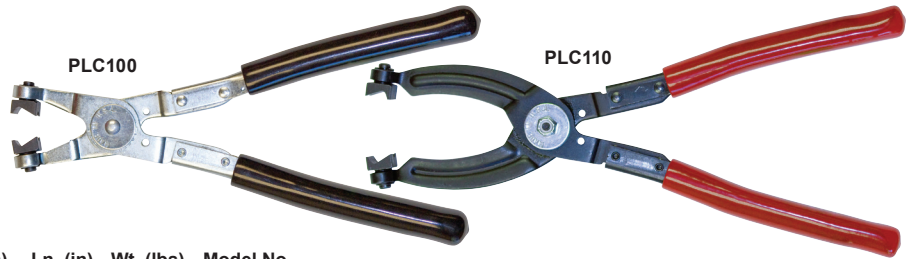


Description	Jaw Ln. (in)	Jaw Wd. (in)	Ln. (in)	Wt. (lbs)	Model No.
Click Pliers - Straight	2	1	9	0.45	PLC100
Click Pliers - Straight	3-1/2	1-3/4	10-1/2	0.45	PLC110

## Kant-Twist™ Cantilever Clamps



### Features

- Will not "walk-off-center"
- Eliminates distorting and twisting action of C-clamps
- Cantilever design provides 4:1 clamp ratio
- Three different gripping surfaces
- Built-in "V" block for round stock
- Free floating jaws adjust to uneven surfaces
- Copper plated jaws, screw and handle are ideal for welding
- Much lighter than C-Clamps. Great where weight is a factor
- Deep throat provides farther reach onto material
- Stainless steel clamps are ideal for use in corrosive, sanitary or magnetic application

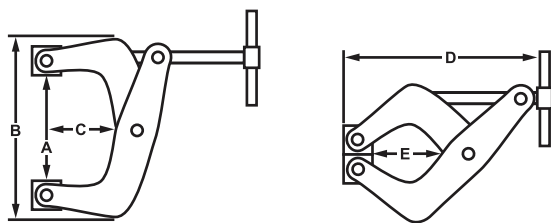

Max Jaw Capacity A (in)	Throat Depth Open B (in)	Open Width C (in)	Overall Length D (in)	Throat Depth Closed E (in)	Max Clamp Force (lbs)	Wt. (lbs)	Model No.
<b>T-Handle, Copper Plated Jaws, Screw and Handle</b>							
1	1/2	1-3/4	2-1/8	1/2	350	0.13	K010T
2	1-1/8	3-1/4	3-1/2	1-1/4	800	0.45	K020T
3	1-1/4	5	5-1/4	1-3/4	1500	1.25	K030T
6	3-1/8	8-1/4	6-1/4	3-3/8	2000	3.00	K060T
<b>Round Handle, Copper Plated Jaws, Screw and Handle</b>							
3/4	3/8	1-3/8	1-1/2	3/8	200	0.08	K007R
1	1/2	1-3/4	2-1/8	1/2	350	0.13	K010R
1-1/2	1-1/8	3	3	1	600	0.25	K015R
2	1-1/8	3-1/4	3-1/2	1-1/4	800	0.50	K020R
<b>T-Handle Deep Throat, Copper Plated Jaws, Screw and Handle</b>							
2-7/16	2	4-1/16	4-1/8	1-13/16	700	0.58	K025TD
4-1/2	2-1/4	6-3/4	7	3-13/16	1700	1.80	K045TD
6	4-1/2	10	11	5-1/2	2000	4.16	K060TD
<b>T-Handle 303 Stainless Steel Construction</b>							
2	1-1/8	3-1/4	3-1/2	1-1/4	700	0.45	K020TS
3	1-1/4	5	5-1/4	1-3/4	1200	1.25	K030TS
4-1/2	2-1/4	6-3/4	7	2-1/2	1500	1.80	K045TS