




# Inline Vacuum Lifters

Vacuum Lifters For Smaller Or Thinner Sheets

**AUTOMATION**

AG-04C

Industrial Magnetics, Inc. • 1385 M-75 South • Boyne City, MI 49712 • p: 888.582.0823 • f: 231.582.2704 • w: www.magnetics.com • e: imi@magnetics.com

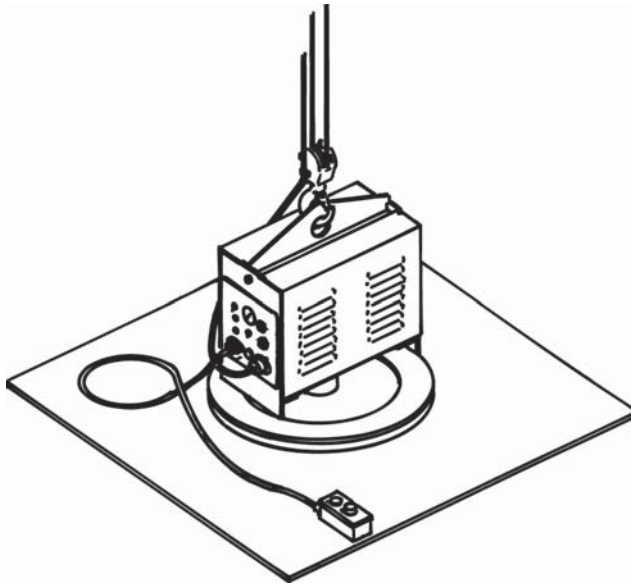

Overall Height - 24"

• Application Specification Sheet On Back

## VL1 Inline Vacuum Lifters

Capacity (lbs.)	Base Wt. (lbs.)	Power-Pac	Neoprene Pad Dia. (in.)
-----------------	-----------------	-----------	-------------------------

### Shop Air - Venturi Unit

400	28	V-40	10-5/8
800	33	V-40	14-1/4
1,400	42	V-40	19

### Electric Unit

400	100	UNIVAC-250	10-5/8
800	104	UNIVAC-250	14-1/4
1,400	192	UNIVAC-330	19

### Maximum Sheet Size for Specific Material Thickness

23-24 Gauge .0250"	18 Gauge .0478"	11-12 Gauge .1150"	6 Gauge .1950"
36" x 36" (3' x 3')	48" x 48" (4' x 4')	72" x 72" (6' x 6')	96" x 96" (8' x 8')

## VL2 Inline Vacuum Lifters

Capacity (lbs.)	*Base Wt. @ 4' (lbs.)	Power-Pac	Neoprene Pad Dia. (in.)
-----------------	-----------------------	-----------	-------------------------

### Shop Air - Venturi Unit

340	170	V-40	7-1/4
800	180	V-40	10-5/8
1,200	190	V-40	12-1/4
1,600	200	V-40	14-1/4
2,800	225	V-40	19

### Electric Unit

340	300	UNIVAC-250	7-1/4
800	315	UNIVAC-250	10-5/8
1,200	320	UNIVAC-250	12-1/4
1,600	330	UNIVAC-250	14-1/4
2,800	355	UNIVAC-330	19

### Maximum Sheet Size for Specific Material Thickness

23-24 Gauge .0250"	18 Gauge .0478"	11-12 Gauge .1150"	6 Gauge .1950"
36" x 72" (3' x 6')	48" x 96" (4' x 8')	72" x 144" (6' x 12')	96" x 192" (8' x 16')

\*All models come with load beam lengths of 4, 5, 6 or 8 feet in length. For lengths of 5, 6 and 8 feet add 21 lbs, 42 lbs and 84 lbs to the base weight respectively.

## VL4 Inline Vacuum Lifters

Capacity (lbs.)	*Base Wt. @ 5' (lbs.)	Power-Pac	Neoprene Pad Dia. (in.)
-----------------	-----------------------	-----------	-------------------------

### Shop Air - Venturi Unit

680	225	V-40	7-1/4
1,600	250	V-40	10-5/8
2,400	265	V-40	12-1/4
3,200	280	V-40	14-1/4

### Electric Unit

680	260	UNIVAC-250	7-1/4
1,600	380	UNIVAC-250	10-5/8
2,400	395	UNIVAC-250	12-1/4
3,200	410	UNIVAC-330	14-1/4
5,600	465	UNIVAC-330	19

### Maximum Sheet Size for Specific Material Thickness

23-24 Gauge .0250"	18 Gauge .0478"	11-12 Gauge .1150"	6 Gauge .1950"
36" x 144" (3' x 12')	48" x 200" (12' x 16-2/3')	72" x 300" (6' x 25')	96" x 320" (8' x 26-2/3')

\*All models come with load beam lengths of 5, 6, 8, 10, 12, 15 and 20 feet in length. For lengths of 6, 8, 10, 12, 15 and 20 feet add 21, 63, 105, 147, 210 and 315 lbs to the base weight respectively.

### Key Markets

Fabrication, Stamping, Steel Service Centers, Appliance, Office Furniture

### Related Products

Transporter® MagVac, All Material Handling Solution Magnets For Ferrous Metal

# Inline Vacuum Lifters

Vacuun Lifters For Smaller Or Thinner Sheets

**Customer:** \_\_\_\_\_ **Date:** \_\_\_\_\_

Material To Be Handled: \_\_\_\_\_

Material Temperature Is: \_\_\_\_\_

Material Dimensions:

Minimum Length: \_\_\_\_\_ Width: \_\_\_\_\_ Thickness: \_\_\_\_\_

Maximum Length: \_\_\_\_\_ Width: \_\_\_\_\_ Thickness: \_\_\_\_\_

Maximum Capacity Required (weight): \_\_\_\_\_

**Power Available:**

- Electric - specify:     115v/1ph/60hz     230-460v/3ph/60hz     230v dc
- Compressed Air     No external power - Battery required

**Options:**

- Side Handle                       Parking Stand                       Audible Vacuum Warning
- Custom Pendant Control     Wireless Pendant Control

**Budget and Time Frame**

- A.** Is this a funded project?    Yes \_\_\_\_\_    No \_\_\_\_\_
- B.** What is the Budget Range for this Vacuum Lifter: \_\_\_\_\_
- C.** What is the Time Frame for purchase and installation: \_\_\_\_\_