

CUTTING TABLE TOOLS & RETRIEVERS



RapidFire Retriever®



Features

- Retrieve hot parts off cutting tables with speed & precision!
- Increase production while reducing the potential for injury
- Powerful Rare Earth Magnet holds part securely
- "On-Command" release with just a quick blast of shop air
- Actuate release with just one finger, it's as simple as the pull of a trigger



Lift - lbs (kg)	Ln. (in)	Wt. (lbs)	Model No.
35.0 (15.88)	24	2.1	RFR2400
35.0 (15.88)	36	2.3	RFR3600
35.0 (15.88)	48	2.5	RFR4800
16.0 (7.40)	7	0.5	RFR7-15
35.0 (15.88)	7	0.8	RFR7-30

Power Grip



Features

- Effective holding against shear force
- Securely grips heavy parts
- Maximum Temp. 300°F (148°C)



Lift - lbs (kg)	Ht. (in)	Wd. (in)	Ln. (in)	Poles	Wt. (lbs)	Model No.
25.0 (11.34)	2	3/4	2-1/8	2	0.40	AC2100WLH
51.5 (23.36)	2-1/4	3/4	4	2	0.75	AC2200WLH
92.5 (41.96)	2-3/4	1-7/8	5-1/4	4	1.80	AC2201WLH


Magnetic TriggerLift®



Hand held lift grips parts with an easy to use trigger release.

Features

- Retrieve hot parts from cutting tables
- One handed operation
- Permanent magnet
- Move parts faster and easier
- Aluminum housing
- Maximum Temp. 300°F (148°C)



Lift - lbs (kg)	Ht. (in)	Wd. (in)	Ln. (in)	Wt. (lbs)	Model No.
50.0 (22.68)	4-13/16	2-3/8	3-3/8	1.50	B090


Magnetic Sheet Handlers

Features

- Lift or move sheets, plates, hot or oily parts
- Handle sheets stacked horizontally or vertically
- Protect workers from cuts, slivers, nicks & burns
- Increase productivity

Note: Not intended to be used with a crane

Lift - lbs (kg)	Th. (in)	Wd. (in)	Handle Ln. (in)	Overall Ln. (in)	Mag. Ln. (in)	Mag. Th. (in)	Wt. (lbs)	Max. Penetration (in)	Model No.
50.0 (22.6)	4	3-5/8	8	11-1/2	6-1/8	1-3/8	3.75	3/16	B100
125.0 (56.7)	4	7-1/4	8	11-1/2	6-1/8	1-3/8	8.25	5/16	B250
200.0 (90.7)	4	7-1/4	8	11-1/2	6-1/8	1-3/8	8.25	5/16	B400
300.0 (136.0)	4	7-1/4	8	11-1/2	6-1/8	1-3/8	8.25	5/16	B600

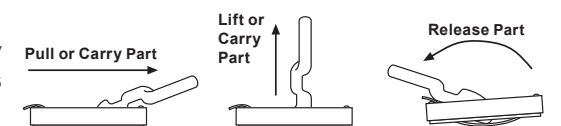

Grip Stick Retriever



Features

- Reduce employee injury by keeping hands out of press
- Magnet & Grip ends are interchangeable.
- Retrieve hot parts
- 10° angled handle



Lift - lbs (kg)	Type	Ht. (in)	Wd. (in)	Ln. (in)	Wt. (lbs)	Model No.
12.5 (5.67)	Low Profile	7/8	1-3/8	14	0.65	IMPL2100
43.5 (19.73)	Low Profile	7/8	1-3/8	14	0.65	IMPL2104
40.0 (18.14)	Heavy Duty	1-7/8	7/8	14	0.90	IMPL3040
60.0 (27.21)	Heavy Duty	1-7/8	1-7/8	14	1.05	IMPL3060

Power Grip Plus



Features

- Securely grips heavy/hot/sharp parts
- Lightweight, non-conductive nylon handle
- Easy side-roll release
- Maximum Temp: Ceramic 300°F (148°C), Neodymium 180°F (82°C), Samarium Cobalt 392°F (200°C)



Note: Magnet Length 6"
Magnet Width 0.56"

Lift - lbs (kg)	Magnet Type	Ht. (in)	Wd. (in)	Ln. (in)	Wt. (lbs)	Model No.
50 (22.68)	Ceramic	5	2.17	7.5	2.6	PG2050C
180 (81.65)	Neodymium	5	2.17	7.5	2.6	PG2180N
110 (49.90)	Samarium	5	2.17	7.5	2.6	PG2110S

ON/OFF Power Grip

Features

- Switchable Rare Earth Magnet
- Securely grips heavy parts
- Works on flat or pipe
- Max. Temp. 180°F (82°C)
- Locking On/Off Handle
- Comfort Grip



Lift lbs (kg)	Round lbs (kg)	Ht. (in)	Wd. (in)	Ln (in)	Magnet Wd. (in)	Magnet Ln (in)	Wt. (lbs)	Model No.
60 (27.22)	30 (13.61)	5	2	6	1-1/2	1-1/4	1.65	PG3060N
100 (45.36)	50 (22.68)	7-3/4	3-3/8	7-1/2	2-1/2	2	5.65	PG3100N

Lift value on pipe varies based on diameter and wall thickness.

